
LASHING CHAIN

- Material: high quality alloy steel
- Surface treatment: self-color, polishing, blackened, painted, plastic coating, electric galvanized etc.
- Manufacture standard: ISO, EN, DIN, BS, JIS, ASTM
- Quality grade: G70, G80, G100
- Safety factor: Min.4
- Product marking: required by client.

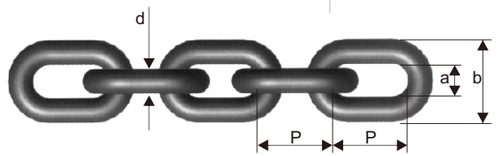

Size mm	Width(mm) Inside min. a	outside max. b	Min. Breaking Load KN G70	G80	G100	Weight kg/m
6x35	7.5	22	39.5	45.2	56.5	0.66
6.3x18.8	8.2	22.4	43	50	62	0.79
7.3x23.8	11.3	26.95	58	63	83	1.145
8x23.85	11.65	28.35	70	80.4	100	1.374
9x57	15	34	89	100	127	1.421
10x29.8	14	35	109	125	157	2.144
10x65	18	42	109	125	157	1.75
13x38	17.1	45	185	214	165	3.693
13x82	23.4	54.6	185	214	165	2.95
16x100	28.8	67.2	281	320	400	4.45

TRANSPORT CHAIN-GENERAL

Grade B

Size mm	Width mm) Inside min. a	Outside max. b	Curce Radius mm	Testing Load KN	Elongation at test load max. %	Min. Breaking Load KN	Elongation at breaking load min. %	Weight kg/m
10x40	12	34	15	85	1.4	110	12	1.9
14x50	17	48	22	150	1.4	190	12	4
18x64	21	60	28	260	1.4	320	12	6.6
19x64.5	22	63	28.5	290	1.4	360	12	7.8
22x86	26	74	34	380	1.4	480	12	9.5
24x86	28	79	37	460	1.4	570	12	11.6
24x87.5	28	79	37	460	1.4	570	12	11.5
26x92	30	86	40	540	1.4	670	12	13.7
30x109	34	98	46	710	1.4	890	12	18

Grade C

Size mm	Width (mm) Inside min. a	Outside max. b	Curce Radius mm	Testing Load KN	Elongation at test load max. %	Min. Breaking Load KN	Elongation at breaking load min. %	Weight kg/m
10x40	12	34	15	100	1.6	130	12	1.9
14x50	17	48	22	200	1.6	250	12	4
18x64	21	60	28	330	1.6	410	12	6.6
19x64.5	22	63	28.5	360	1.6	450	12	7.8
22x86	26	74	34	490	1.6	610	12	9.5
24x86	28	79	37	580	1.6	720	12	11.6
24x87.5	28	79	37	580	1.6	720	12	11.5
26x92	30	86	40	680	1.6	850	12	13.7
30x109	34	98	46	900	1.6	1130	12	18

TOW CHAIN

Chain Size mm	Length m	Lashing Capacity kg	Weight kg
8	3.5	4000	5.71
10	3.5	6250	9.43
13	3.5	10600	15.83





GOLDEN GALVANIZED CHAIN SLING (G80/G70/G43), with bend hook on one end



Chain size& Length	W.L.L. (lbs) G80/G70/G43	M.B.S. (lbs) G80/G70/G43	Unit Weight (kg)
7.1mm x 9'	3300/3150/2600	13200/12600/7800	3.38
8.0mm x 9'	4700/4400/3900	18800/17600/11600	4.05
10mm x 9'	6600/5400/3720	26400/16200/14880	6.50

Different length is available depending order`s request.

BLACK-TEMPERED BINDER CHAIN (G80/G43), with eye or clevis grab hooks on both ends



Chain size& Length	W.L.L. (lbs) G80/G43	M.B.S. (lbs) G80/G43	Unit Weight (kg)
10mm x 20'	6600/3720	26400/14880	14.10
13mm x 20'	11900/6280	47600/25120	23.10
16mm x 20'	17600/9500	70000/38000	36.20

Different length is available depending order`s request.

GOLDEN GALVANIZED BINDER CHAIN (G80/G70/G43), with eye/clevis grab hooks on both ends



Chain size& Length	W.L.L. (lbs) G80/G70/G43	M.B.S. (lbs) G80/G70/G43	Unit Weight (kg)	Qty/drum (pcs)
1/4 x 14'	3300/3150/2600	13200/12600/7800	4.0	50
5/16 x 14'	4700/4400/3900	18800/17600/11600	6.0	40
3/8 x 14'	6600/5400/3720	26400/16200/14880	10.3	25